

Q-FLEX QA-650 ACCELEROMETER

I Economical sensor package

For Q-Flex technology in an economical package, Honeywell produces the QA-650 for industrial grade applications, including: automotive test instrumentation, braking system deceleration, bridge and building sway and tilt monitoring, industrial and robotic control, land vehicle navigation, subway and high-speed train ride comfort control and offshore drilling platform motion monitoring.

As with the entire Q-Flex family of accelerometers, the QA-650 features a patented Q-Flex etched-quartz-flexure seismic system. An amorphous quartz proof-mass structure provides excellent bias, scale factor and axis alignment stability.

The integral electronics develops an acceleration-proportional output current, providing both static and dynamic acceleration measurements. By use of a customer supplied output load resistor, appropriately scaled for the acceleration range of the application, the output current can be converted into a voltage.



Q-Flex QA-650



**MORE THAN
3M QUARTZ
ACCELEROMETERS
SHIPPED OVER THE
PAST TWO DECADES**


FEATURES

- Tactical navigation grade performance
- High value
- Environmentally rugged
- Analog output
- Compact design
- Built-in test
- Field-adjustable range

APPLICATIONS

- Automotive test instrumentation
- Autonomous vehicle testing
- Braking system deceleration
- Bridge and building sway and tilt monitoring
- Industrial and robotic control
- Land vehicle navigation
- Subway and train ride comfort control
- Offshore drilling platform motion monitoring

CONFIGURATION DRAWINGS

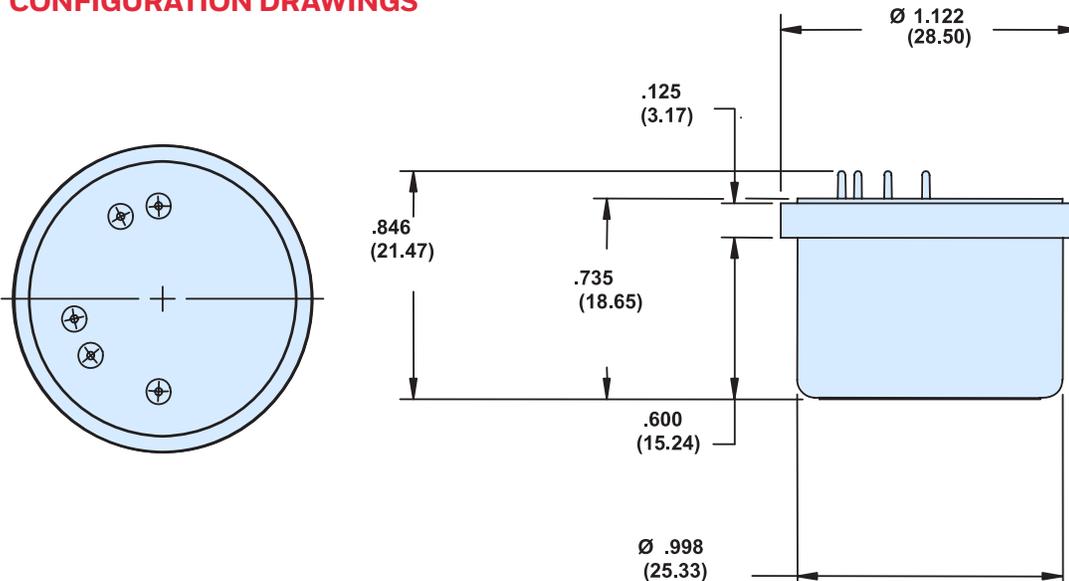

Honeywell

PERFORMANCE CHARACTERISTICS

Performance	
Input Range	±30 g
Bias	<15 mg
One-year Composite Repeatability	<2500 µg
Temperature Sensitivity	<100 µg/°C
Scale Factor	1.20 to 1.40 mA/g
One-year Composite Repeatability	<2500 ppm
Temperature Sensitivity	<200 ppm/°C
Axis Misalignment	<15000 µrad
Vibration Rectification	<100 (50-500 Hz) µg/g ² rms
Intrinsic Noise [°g-rms]	<3000 (0-10,000 Hz)
Environmental	
Operating Temperature Range	-55 to +96°C
Shock	100 g
Vibration Peak Sine	25 g @ 30-500 Hz
Resolution/Threshold	<10 µg
Bandwidth	>300 Hz
Thermal Modeling	Yes
Electrical	
Quiescent Current per Supply	<16 mA
Quiescent Power	<480 mW @ ±15 VDC
Input Voltage	±13 to ±18 VDC
Physical	
Weight	51 Nominal, 65 Max. grams
Diameter below mounting surface	Ø1.045 ±0.005 in.
Height - bottom to mounting surface	0.617 in. Max.
Case Material	300 Series Stainless Steel

Additional product specifications, outline drawings and block diagrams and test data are available on request.

ISO-9001 CERTIFICATION SINCE 1995

DISCLAIMER: Specifications are subject to change without notice. Honeywell reserves the right to make changes to any product or technology herein to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of the product.

Accelerometers exported from the United States must be done in accordance with the Export Administration Regulations (EAR) and/or the International Traffic in Arms Regulations (ITAR) as applicable.

For More Information

aerospace.honeywell.com

Honeywell International, Inc. Defense and Space Electronic Systems Redmond

15001 N.E. 36th Street
Redmond, Washington 98073-9701
PHONE: 888 206 1667
FAX: 425 883 2104
aerospace.honeywell.com

N61-2511-000-000 | 07/2020
© 2020 Honeywell International Inc.

THE
FUTURE
IS
WHAT
WE
MAKE IT

Honeywell