




eTALIN

INS/GNSS Navigator with Embedded GPS Receiver

Honeywell

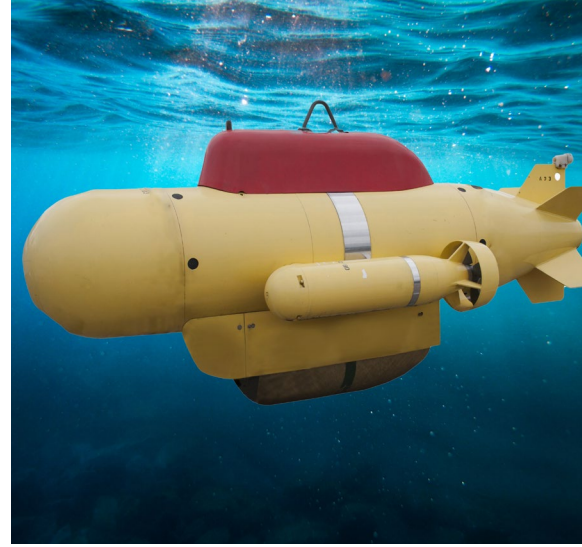

INS/GNSS Navigator with Embedded GPS Receiver

SYSTEM CHARACTERISTICS

Operating Ranges

- Attitude: Alignment and orientation in any direction
- Angular Rate: High speed attitude data

Power Requirements

- 18-36 Vdc: <30 watts*

Thermal Operating Range

- No cooling required: -54°C to 71°C (30 minutes at 95°C)

Navigation Sensors

- 3-axis inertial sensors (internal), VMS, DAGR, PLGR, embedded SAASM GPS

Software

- Modular – partitioned for cost-effective system missionization

Weight

- <12 pounds (<5.4 kg)

Interfaces

- 1000 BaseT, Ethernet PDI, External GPS, VMS
- GPS RS-422 GPS-ICD-153C, HAVEQUICK with 1 or 10PPS

Form Factor

- Approx. 8.5l x 5.75w x 5.5h inches (excluding flanges and connectors)

**FLEXIBLE, RELIABLE,
BEST-VALUE INS/GPS
NAVIGATOR**

SYSTEM FEATURES

- Over 16,000 TALIN systems fielded on over 60 commercial and military platforms worldwide including sensor platforms, survey applications, mining equipment, towed and self-propelled weapons, and combat vehicles.
- Instant on! On-the-move alignment
- Multiple accuracy configurations to meet different application requirements
- Expansion slot to facilitate technology upgrades and platform missionizations
- Uses Honeywell's proven Digital Laser Gryo (DLG) and Accelerometers

Performance	eTALIN 2000	eTALIN 3000	eTALIN 4000
Horizontal Pos INU only INU/VMS INU/VMS/GPS PPS INU/VMS/GPS SPS	< 35m CEP 0.5% of DT CEP < 10m CEP < 60m CEP	< 25m CEP 0.35% of DT CEP < 10m CEP < 60m CEP	< 18m CEP 0.25% of DT CEP < 10m CEP < 60m CEP
Vertical Pos INU only INU/VMS INU/VMS/GPS PPS INU/VMS/GPS SPS	< 30m PE 0.25% of DT PE < 10m PE < 75m PE	< 16 m PE 0.20% of DT PE < 10m PE < 75m PE	< 10 m PE 0.15% of DT PE < 10m PE < 75m PE
Heading/Pointing Accuracy (RMS) *Sec (Lat)	< 4.0 mils or < 2.0 mils*	< 2.0 mils or < 1.0 mils*	< 1.0 mils or < 0.5 mils*
Heading Stability (RMS)	< 0.4 mils/hr	< 0.3 mils/hr	< 0.2 mils/hr
Pitch & Roll Accuracy (RMS)	< 1.0 mils	< 1.0 mils	< 0.5 mils
Max Alignment Time Static or Gyro Compass Dynamic or "On the Move"	< 5.0 minutes < 12.0 minutes	< 5.0 minutes < 12.0 minutes	< 10.0 minutes < 16.0 minutes

*Application and configuration dependent

For More Information

aerospace.honeywell.com/talin

Honeywell Aerospace

1944 East Sky Harbor Circle
Phoenix, AZ 85034
aerospace.honeywell.com

N61-2528-000-000 | 09/20
© 2020 Honeywell International Inc.



**THE
FUTURE
IS
WHAT
WE
MAKE IT**

Honeywell